



### UTX series PV Cable Connector

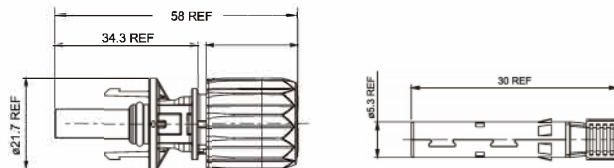


Part Number: UTXCF.....

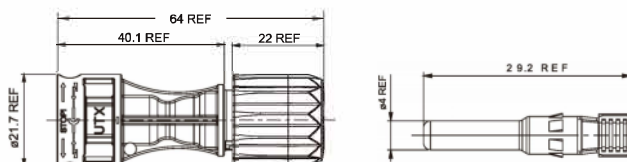

Part Number: UTXCM.....



#### Technical Data

Rated voltage	1500V DC per UL 6703 1500V DC per TÜV IEC62852 1500V DC per JET IEC61730	Cable OD range	Ø5.3mm – 7.65mm
Rated current (per IEC 62852, 85°C)	25A (2.5mm <sup>2</sup> /14AWG) 35A (4.0mm <sup>2</sup> /12AWG) 45A (6.0mm <sup>2</sup> /10AWG)	Unlock options	Tool unlock type(TÜV/UL/JET) or Manually unlock type(TÜV only)
Rated current (per UL6703)	15A (2.5mm <sup>2</sup> /14AWG) 20A (4.0mm <sup>2</sup> /12AWG) 30A (6.0mm <sup>2</sup> /10AWG)	Ingress protection rating	IP68, mated (1 m, 1 h) & IP2X touch-proof, unmated
Rated impulse voltage	16kV(1500V DC per TÜV)	Ambient temperature range	-40°C to +85°C (TÜV) -40°C to +90°C (UL)
Typical contact resistance	≤0.3mΩ	Upper limiting temperature	+105°C
Contact material	Tin-plated Copper Alloy	Flame class	UL 94 V-0
Contact system options	Cold Formed (CF) or Stamped & Formed (S&F)*1	Oversvoltage category/Pollution degree	CATIII/2
Insulation material	PPE/PA	Material safety	RoHS, REACH compliant
Type of termination	Crimping	Approvals:	   TÜV certified to IEC 62852 UL certified to UL6703 JET certified to IEC61730 R50340393    E469330    B14T0080


#### How to Order a Connector (please choose one code per position, below)

Part Number Coding: **UTX** **C** **F** **A** **4** **A** **M**

Product Line	Product Type	Gender	Contact type	Cable Size	Certifications	Packaging	
<b>UTX</b> (UTX series)	<b>C</b> (Connector)	<b>F</b> Female	<b>A</b> Stamped and Formed contact (S&F)	<b>0</b>	<b>A</b> Triple UL/TÜV/JET Certified	<b>I</b> 1 pc/bag	
				<b>2</b>			Without Contact
		<b>M</b> Male	<b>B</b> Cold Formed contact (CF)	<b>4</b> *2	4.0mm <sup>2</sup> /12 AWG & 6.0mm <sup>2</sup> /10AWG(S&F)	<b>B</b> *3 Only TÜV Certified	<b>C</b> 100 pcs/bag
				<b>6</b>	4.0mm <sup>2</sup> /12AWG(CF) 6.0mm <sup>2</sup> /10AWG(CF)		

\*2. When ordering a S&F contact, please use cable size order code "4" for both 4.0mm<sup>2</sup>/12AWG & 6.0mm<sup>2</sup>/10AWG.  
 \*3. When ordering cable connectors, please use certifications order code "B" for Manually unlock type cable gland connectors.

\*1: when ordering S&F contacts in reel vision, page 8

 \*Crimping Tool, Page 18  
Sealing caps, Wrench Tools, page 19