

TWINPLUS MODULE SERIES

HIGH EFFICIENCY MONO-PERC M4-9B-R

400-420W



OUTSTANDING PRODUCT PERFORMANCE


- Competitive high-temperature performance with ameliorated temperature coefficient
- Minimized power loss in cell connection
- Better performance under shading effect
- Decreased nominal operating cell temperature to $45 \pm 2^{\circ}\text{C}$
- Higher power generation with multi-busbar and half-cut technology

TRUSTWORTHY QUALITY AND RELIABILITY

- Guaranteed 0~+5W positive tolerance secures reliable power output
- 5400Pa maximum snow load, 2400Pa maximum wind load
- Optimized electrical design lowers hot spot risk and operating current

PID RESISTANT

- Industry-leading cell processing technology and electrical design ensure solid PID resistance

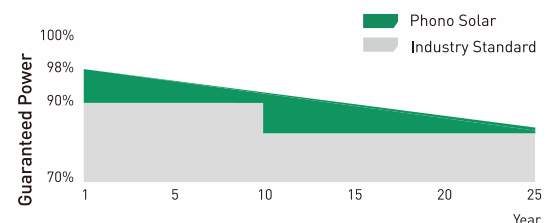

12-year Product Warranty | 25-year Linear Performance Warranty

MANAGEMENT SYSTEM CERTIFICATES

IEC 61215, IEC 61730

ISO 9001:2015 / Quality management system

ISO 14001:2015 / Standards for environmental management system

OHSAS 18001:2007 / International standards for occupational health & safety

IEC TS 62941: 2016 Terrestrial photovoltaic (PV) modules-guidelines for increased confidence in PV module design qualification and type approval



Bloomberg Tier¹
NEW ENERGY FINANCE



ELECTRICAL TYPICAL VALUES

Model	1000V	PS400M4-22/WH		PS405M4-22/WH		PS410M4-22/WH		PS415M4-22/WH		PS420M4-22/WH	
	1500V	PS400M4H-22/WH		PS405M4H-22/WH		PS410M4H-22/WH		PS415M4H-22/WH		PS420M4H-22/WH	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	
Rated Power (P _{mpp})	400	300	405	304	410	307	415	311	420	315	
Rated Current (I _{mpp})	10.51	8.48	10.58	8.54	10.65	8.60	10.72	8.65	10.79	8.71	
Rated Voltage (V _{mpp})	38.06	35.34	38.28	35.55	38.50	35.75	38.72	35.95	38.93	36.15	
Short Circuit Current (I _{sc})	11.01	8.89	11.12	8.98	11.23	9.06	11.34	9.15	11.45	9.24	
Open Circuit Voltage (V _{oc})	45.25	42.97	45.36	43.07	45.47	43.18	45.58	43.28	45.69	43.39	
Module Efficiency (%)	19.98		20.23		20.48		20.73		20.98		

STC(Standard Testing Conditions):Irradiance 1000W/m², AM 1.5, Cell Temperature 25°C

NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/S

MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline 166mm x 83mm
Dimension (L× W × H)	Length: 1925mm (75.79 inch)
	Width: 1040mm (40.94 inch)
	Height: 30mm (1.18 inch)
Weight	22.5.0kg (49.60lbs)
Front Glass	3.2mm Toughened Glass
Frame	Anodized Aluminium Alloy
Cable (Including Connector)	4mm ² (IEC) (+):450mm,(-):250mm or Customized Length
Junction Box	IP 68 Rated

TEMPERATURE RATINGS

Voltage Temperature Coefficient	-0.28%/°C
Current Temperature Coefficient	+0.05%/°C
Power Temperature Coefficient	-0.35%/°C
Tolerance	0~+5w
NOCT	45±2°C




ABSOLUTE MAXIMUM RATING

Operating Temperature	From -40 to +85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	20A
PV Module Classification	II
Fire Rating (IEC 61730)	C
Maximum System Voltage	DC 1500V/1000V

PACKING CONFIGURATION

Container	20' GP	40' HQ
Pieces/Container	275	840

ELECTRICAL CHARACTERISTICS

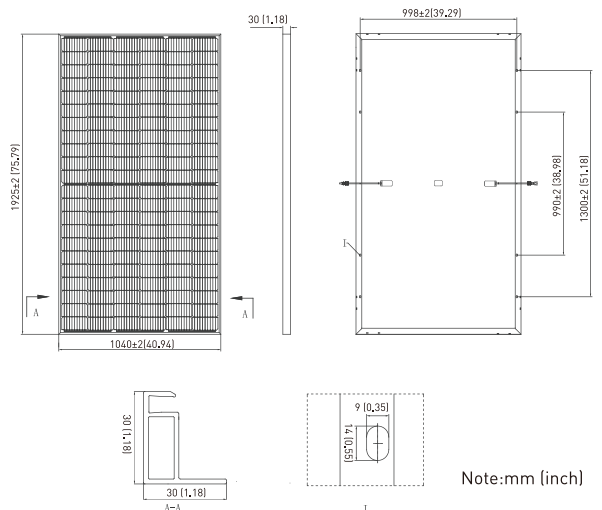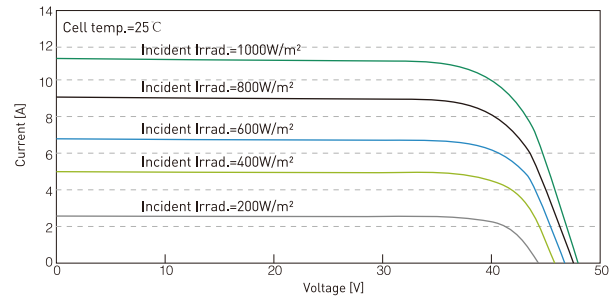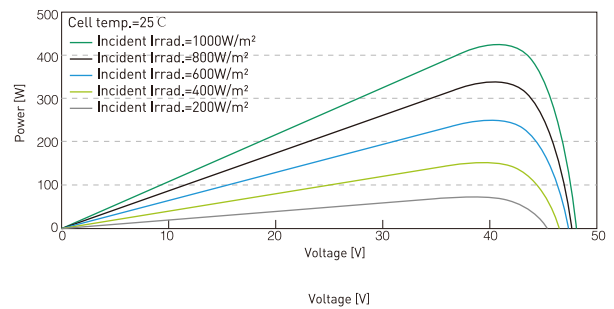

Note:mm (inch)