



Shingled Cell



AC Module



Black Backsheet
Black Frame



Residential



PERFORMANCE 3 AC


Power Range: 370 – 385 W

The new SunPower Performance 3 AC Modules combine enhanced full black shingling technology with the world's most advanced inverter technology. The result is an elegant, optimized solution for any roof.

Backed by an industry-leading warranty and an estimated 35-year useful life,¹ SunPower Performance panels wrap conventional front contact cells with 35 years of materials, engineering and manufacturing expertise to mitigate the reliability challenges of Conventional Panel design.

Factory-integrated Microinverter (MI)

- Integrated AC module
- 25-Year limited product warranty covered by Enphase
- Engineered by Enphase for SunPower AC modules

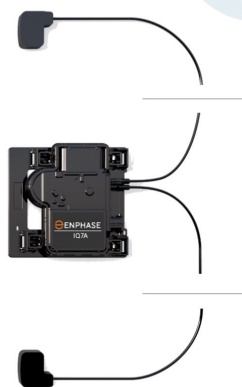

Durability that Translates to More Energy

Engineered to stand up to environmental stresses such as shading, daily temperature swings and high humidity, the SunPower Performance 3 panel delivers up to 7% more energy in the same space over 25 years compared to Conventional mono PERC Panels.²

A Track Record of Innovation Leadership

SunPower Performance panels represent the most deployed shingled cell panel in the industry—innovation protected by a growing portfolio of patents worldwide.³



4+ GW
Deployed



60+
Countries



90+
Patents

A Better Product. A Better Warranty.

Each SunPower Performance panel is manufactured with the confidence to deliver more energy and reliability over time—and backed for 25 years by the SunPower Complete Confidence Panel Warranty.

- Year 1 Minimum Warranted Power Output 98.0%
- Maximum Annual Degradation 0.45%
- Year 25 Minimum Warranted Power Output 87.2%

PERFORMANCE 3 AC Power: 370 – 385 W

| AC Electrical Data | |
|--|----------------------|
| Inverter Model: IQ 7A | @230 VAC |
| Peak Output Power | 366 VA |
| Max. Continuous Output Power | 349 VA |
| Nom. (L-N) Voltage/Range | 219 – 264 V |
| Max. Continuous Output Current | 1.52 A |
| Max. Units per 20 A (L-N) Branch Circuit | 10 |
| Weighted Efficiency ⁴ | 96.5% |
| Nom. Frequency | 50 Hz |
| Extended Frequency Range | 45-55 Hz |
| AC Short Circuit Fault Current Over 3 Cycles | 5.8 A rms |
| Overvoltage Class AC Port | III |
| AC Port Backfeed Current | 18 mA |
| Power Factor Setting | 1.0 |
| Power Factor (adjustable) | 0.8 lead. / 0.8 lag. |

| | DC Power Data | | | |
|---|---|--------------------------|--------------------------|--------------------------|
| | SPR-P3-385-BLK- E3-AC | SPR-P3-380-BLK- E3-AC | SPR-P3-375-BLK- E3-AC | SPR-P3-370-BLK- E3-AC |
| Nom. Power ⁵ (P _{nom}) | 385 W | 380 W | 375 W | 370 W |
| Power Tol. | +5/0% | +5/0% | +5/0% | +5/0% |
| Module Efficiency | 19.6% | 19.4% | 19.1% | 18.9% |
| Temp. Coef. (Power) | -0.34%/°C | | | |
| Shade Tol. | Integrated module-level max. power point tracking | | | |

| Mechanical Data | |
|----------------------|---|
| Solar Cells | Monocrystalline PERC |
| Front Glass | High-transmission tempered glass with anti-reflective coating |
| Junction Box | IP-68, PV4S, 3 bypass diodes |
| Environmental Rating | Microinverter Outdoor rated - IP67 (UL: NEMA type 6) |
| Frame | Class 1 black anodized |
| Weight | 22.2 kg |

| Tested Operating Conditions | |
|-----------------------------|---|
| Operating Temp. | -40°C to +60°C |
| Max. Ambient Temp. | 50°C |
| Relative Humidity | 4% to 100% (Condensing) |
| Max. Altitude | 2000 m |
| Max. Test Load | Wind: 2400 Pa, 245 kg/m ² back Snow: 5400 Pa, 550 kg/m ² front |
| Design Load ⁶ | Wind: 1600 Pa, 163 kg/m ² back Snow: 3600 Pa, 367 kg/m ² front |
| Impact Resistance | 25 mm diameter hail at 23 m/s |
| Microinverter enclosure | Class II double-insulated, corrosion resistant polymeric enclosure |

| Warranties, Certifications, and Compliance | |
|--|--|
| Warranties | <ul style="list-style-type: none"> 25-year limited power warranty 25-year limited product warranty |
| Microinverter Warranty | <ul style="list-style-type: none"> 25-year limited product warranty covered by Enphase warranty⁷ |
| Certifications and Compliance | <ul style="list-style-type: none"> IEC 61215, 61730⁸ IEC 62109-1, 62109-2 IEC 61000-6-3 AS4777.2, RCM IEC/ EN 50549-1:2019, G98/G99 VDE-AR-N-4105 |
| Quality Management Certs | ISO 9001:2004, ISO 14001:2008 |
| PID Test | 1000 V: IEC 62804 |
| Available listing | TUV ⁸ , EnTest |
| EHS Compliance | OHSAS 18001:2007, Recycling Scheme |

1 Performance panels expected useful life of 35 years. Source: "SunPower P-Series Technology Technical Review," Leidos Independent Engineer Report. 2016.

2 SunPower 385 W, 19.6% efficient, connected to an IQ7A, compared to a Conventional Panel on same-sized arrays (310 W mono PERC, 19% efficient, approx. 1.64 m²), 1% more energy per watt (based on PVSIM runs for avg EU climate), 0.1%/yr slower degradation rate (Based on Oct. 2020 review of warranties on manufacturer websites for top 20 manufacturers per IHS 2020) connected to a String Inverter.

3 Based on shipments as of Q2-2020.

4 Tested per EN 50530 (EU).

5 Measured at Standard Test Conditions (STC): irradiance of 1000 W/m², AM 1.5, and cell temperature 25° C.

6 Safety factor 1.5 included.

7 AC modules shall be connected to Enphase Monitoring hardware (ENVOY) to enable Enphase product warranty

8 Refer to DC module, Class C fire rating per IEC 61730.

Designed in U.S.A.

Assembled in China

Specifications included in this datasheet are subject to change without notice.

© 2021 Maxeon Solar Technologies, Ltd. All Rights Reserved. View warranty, patent and trademark information at maxeon.com/legal.

Please read the safety and installation instructions.

Visit www.sunpower.maxeon.com/int/InstallGuideACModules

Paper version can be requested through techsupport.ROW@maxeon.com


539440 REV B / A4_EN

Publication Date: June 2021

SUNPOWER

FROM MAXEON SOLAR TECHNOLOGIES

sunpower.maxeon.com

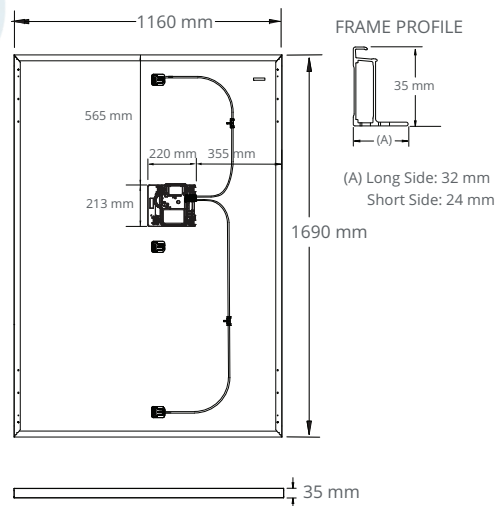

SOLSOL

SOLSOL s.r.o.
Králova 298/4, Brno 616 00, Czech Republic
sales@solsol.cz www.solsol.cz